


P SEA CONCEPTS™

P SEA CONNECT™ 4-PORT HUB

Model MEH-4P

DATASHEET

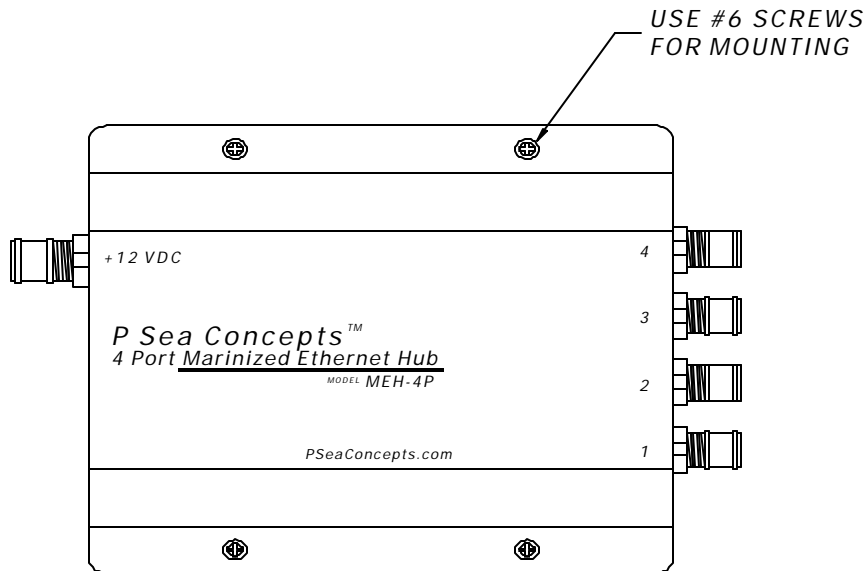

The P Sea Connect™ 4 port hub has the following features :

- Four 10BASE-T network ports (Furuno 6-pin connectors) providing 10mbps networking using unshielded twisted pair wire
- Up-link port (port 4) for connecting other hubs
- "plug and play" installation with no software configuration
- Functions including packet re-timing, collision detection, preamble regeneration, and fragment extension
- Automatic partitioning
- Automatic polarity detection
- 1 year warranty

Technical specifications:

- Complies with IP67 standards
- IEEE 802.3I, 10BASE-T Ethernet
- Class A digital device, pursuant to part 15 of the FCC rules
- Operating temperature: 0-40 degrees C
- Input voltage: 7-35 volts DC
- Max. relative humidity: 90% noncondensing
- Max. power consumption: 5.9W

Precautions:

- Hub to be installed 6' from sources of electromagnetic noise (generators, etc.)
- Maximum cable length 100 meters
- Not intended for prolonged submersion

P SEA VISION™ PRODUCTS
P SEA CONCEPTS™, Copyright 1999-2003

MEH-4P-DS.doc