


P SEA CONCEPTS™
P SEA CONNECT™ 6-PORT SWITCH
Model MES-6P
DATASHEET

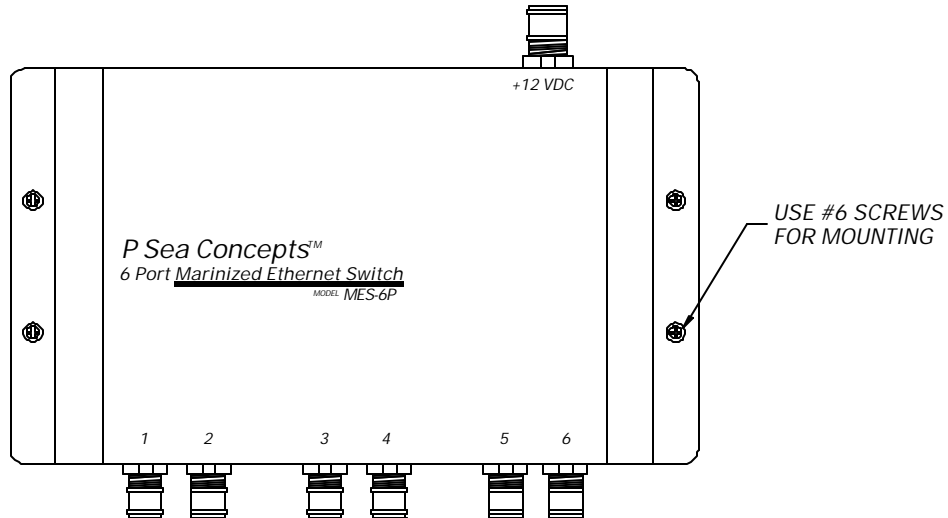

The P Sea Connect™ 6 port hub has the following features :

- Six N-way 10M/100Mbps auto-detect Ethernet/Fast Ethernet ports
- Each port automatically negotiates between 10BASE-T and 100BASE-TX network Speeds, as well as between full and half duplex modes. Any port thus can act as an Up-link To Fast Ethernet or down-link Ethernet
- "plug and play" installation with no software configuration
- Operating at maximum packet filtering and forwarding rate, supports for Store-and-Forward of packet switching
- 256Kbytes of buffer memory per device
- 8K MAC address entries per device
- 1 year warranty**

Technical specifications:

- Complies with IP67 standards
- IEEE 802.3 (10BASE-T Ethernet) and IEEE 802.3u (100BASE-TX Fast Ethernet) Standards
- Class B digital device, pursuant to part 15 of the FCC rules
- Operating temperature: 0°-50°C
- Input voltage: 12 volts DC
- Max. relative humidity: 10%-90% noncondensing
- Max. power consumption: 11.25W

Precautions:

- Hub to be installed 6' from sources of electromagnetic noise (generators, etc.)
- Maximum cable length 100 meters
- Not intended for prolonged submersion

Thank you For using,
P SEA VISION™ PRODUCTS
P SEA CONCEPTS™ Copyright 1999-2003